

HE-5218

Walkthrough Gate




Device Performance

- The system has the function of displaying environmental monitoring data. High performance, high sensitivity, high stability;
- With system networking which can manage multiple devices through one PC.
- Preset metal items weight, volume, size, parts, excluding keys, jewelry, belt buckle and other false alarm.
- Comply with EMC electromagnetic radiation standards, the use of weak magnetic field technology, heart pacemaker wearers, pregnant women, floppy disk, film, videotape and other harmless.

Schematic Diagram of defense area

Unique continuous partition technology, multiple independent partition, more accurate detection

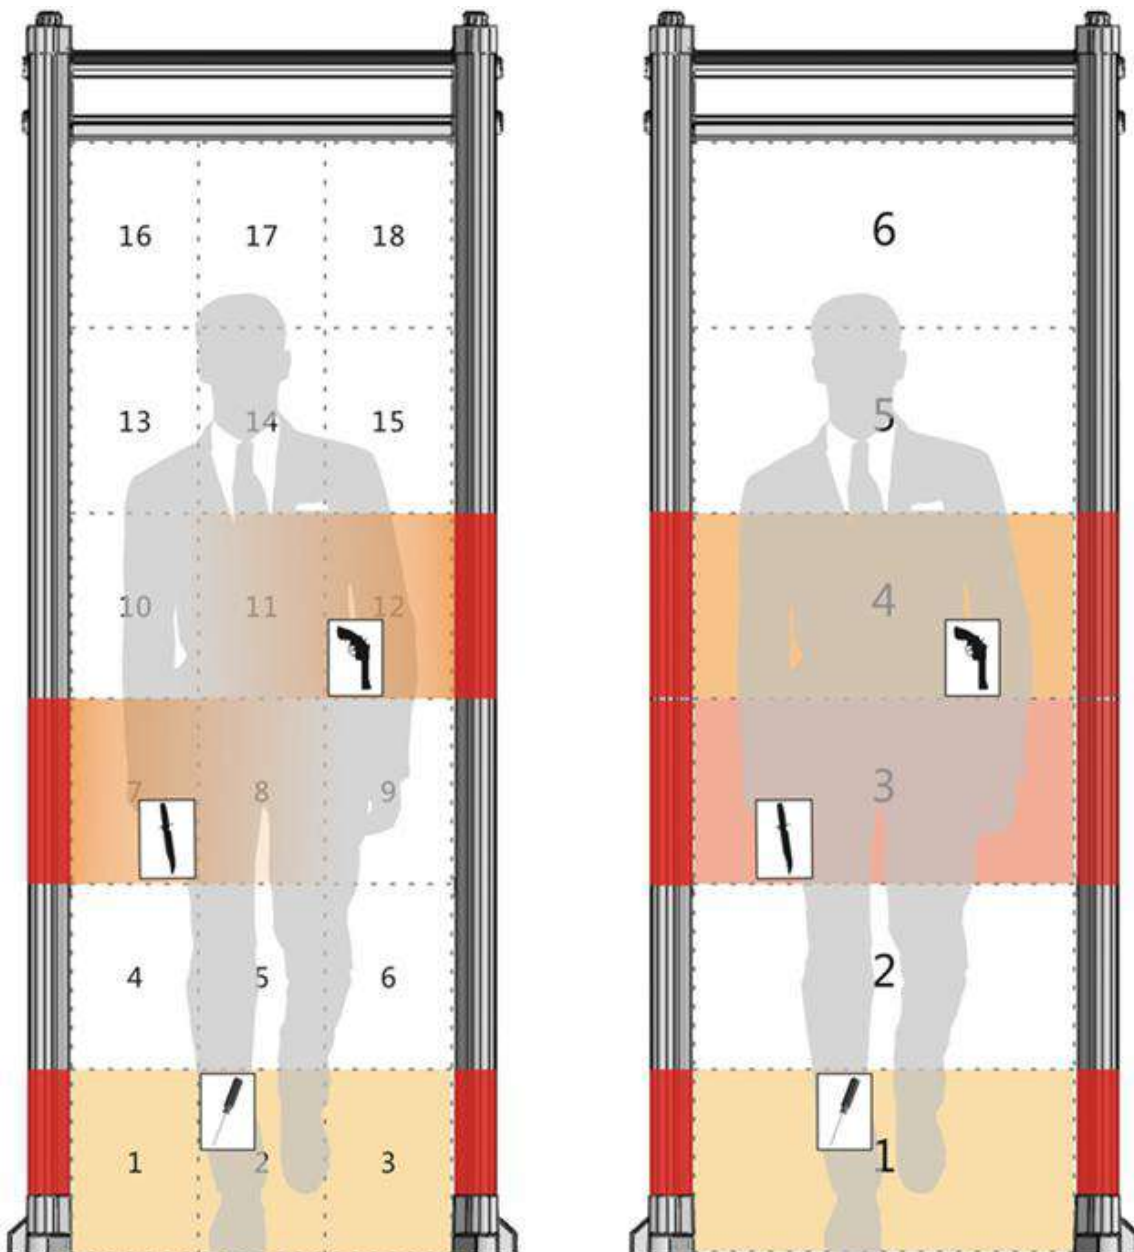

Technical Parameters

Product Model	2018 New LCD
Vertical Dimension	2210×840×460mm
Vertical Aisle Dimension	2050×715×460mm
Packing Dimension	2295×700×200mm
Net Weight	38KG
Gross Weight	43KG
Operating Voltage	AC90V~240V 50 / 60Hz
Power Consumption	12W
Operating Frequency Range	1—50 Bands
Working Environmental Temperature	-20℃~65℃
Installation Environment	(W)100cm*(L)200cm(metal-free minimum range)Sheet Transverse
Regional Detect Metal Precision Range	Maximum Sensitivity≥10g Metal

Technical Standard

Electrical refer to EN60950 safety standard	Compliance
Radiation refer to EN50081-1 standard	Compliance
Anti-interference refer to EN50082-1 standard	Compliance
Implementation GB15210-2003 Walk through metal detector standard	●
Enterprise through ISO9001:2008 quality management system certification	●
Enterprise through OHSAS1 8001 Occupational health certification	●
Enterprise through ISO14001 environmental management	●
Products through the EU CE certification	●

Functional Configuration

Portable metal can be excluding	●
5.4-inch LCD display / Rectangle	●
Integrated four-button panel operation mode	●
One-button remote control operation mode	○
Multi networking interface	○
External control warning device port	○
Secondary development port/upgrade port	○
Pass people statistics function	●



Alarm statistics function	●
Query function of people in and out	○
password protection	●
Multi-location simultaneous detection and alarm function	●
Detection and intelligent distinction of large items	●
Super brightness patch intelligent partition alarm indicator light	●
Ultra-brightness patch double row regions indicator light	●
50 optional working frequency bands	●
Alarm sound mute mode	●
Alarm volume adjustable mode	●
Multiple alarm sound selection modes	●
Front and rear single region alarm indicator light	○
Infrared start and stop function	●
Front bilateral region alarm indicator light	●
Front and rear four regions alarm indicator light	○
The sensitivity of each detection defense zone can be adjusted	●
Each zone sensitivity 0-255 adjustable	●
Safety level 0-100 optional	●
Independent 12 probe interactive 6 sector	○
Independent 12-probe interactive 12-18 sector/optional	●
Battery life:2 hours/optional	○
Battery life:8 hours/optional	○
Multiple quick setup scenarios	●
Recover factory setting	●
Note: "●" in the table means this configuration is available," ○ "means optional.	

